

FOREST[®]

DRAPERY HARDWARE




CCC[®]
Corded Contract System

Product information

- Heavy duty cord operated system, with separate internal cord channels; preventing cord sag and eliminating cord tangle.
- Bendable; it can be curved and reversed curved with a 20 cm (8") radius or continuous curve.
- Heavy duty clickable carriers - 10 carriers on a breakaway strip - UV protected.
- Can also be used for Forest Easyfold and accordiafold drapery systems.
- Maximum fabric weight: 8 kg. per mtr (5,3 LBS per ft).
- Colours available: white, silver.
- Track finish: chromated powder coating with a factory applied patented dry lubricant.
- Lengths available: 3.66 m (12'), 4.27 m (14'), 4.88 m (16'), 6.10 m (20').

Profile


- Shown actual size 1:1
- Aluminium Extrusion
- Weight: 300 gram per mtr (3.22 ounce per ft)
- Dimensions: 20 mm x 20 mm (3/4" x 3/4")



For use in

Hotels - motels - offices - healthcare - schools - residential or any location where a heavy duty cord traverse system is required.

Applications

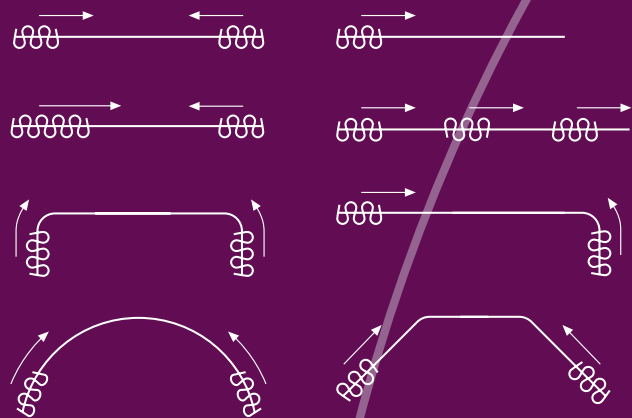


Bending/curving

The track can be curved and reversed curved using a 20 cm (8") radius. Continuous curving can be done with the electric powered bender or by special order from factory.



- ① Carrier
- ② CCS/FMS Master Carrier Underlap
- ③ Traverse cord
- ④ CCS/FMS Master Carrier Overlap
- ⑤ CCS Cord connector
- ⑥ CCS Track
- ⑦ Pulley

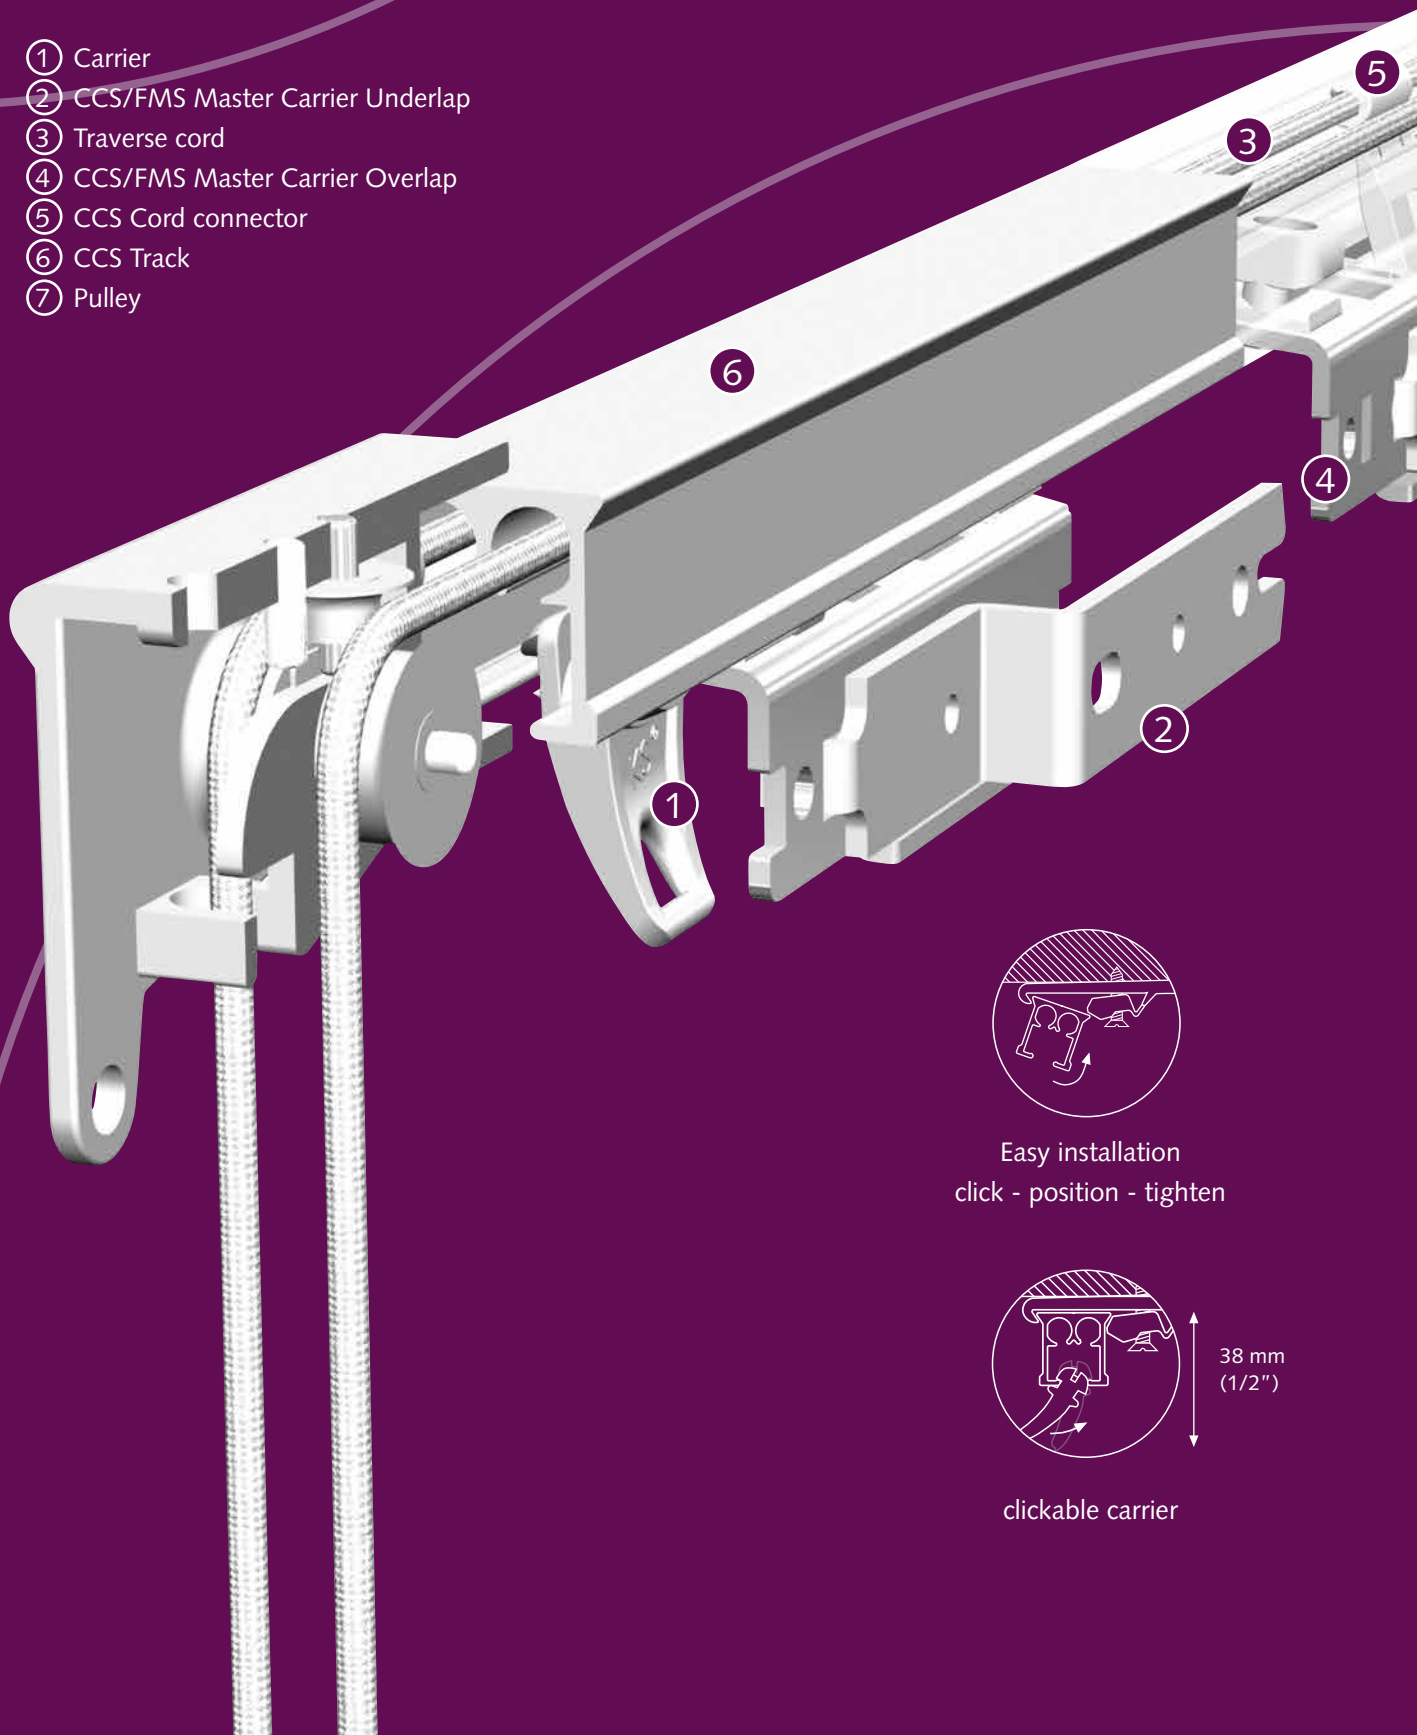


Easy installation
click - position - tighten



38 mm
(1/2")


clickable carrier

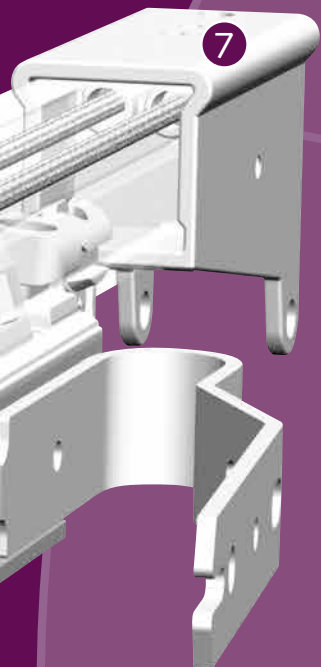


Mounting Brackets

Aluminium Wall Bracket single

A) 7,5 cm (3"): B) 6,3 cm (2")
 A) 10 cm (4"): B) 8,8 cm (3")

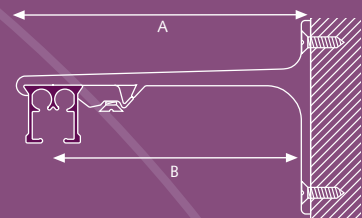

Ceiling bracket




A) Min. 20 cm (8")




Aluminium Wall Bracket double

A) 15 cm (6"): B) 9,2 cm (3"), C) 4,5 cm (2")
 A) 20 cm (8"): B) 9,2 cm (3"), C) 9,5 cm (4")

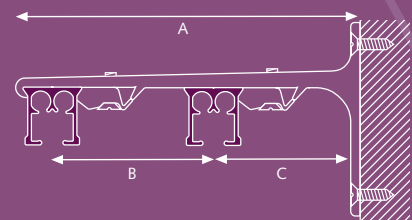

Aluminium Wall Bracket triple

25 cm (10")

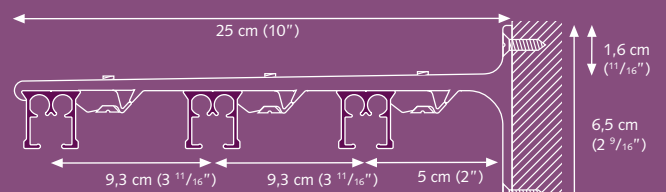

Brackets need to be placed every 60 cm (24").