


FOREST[®]

DRAPERY HARDWARE

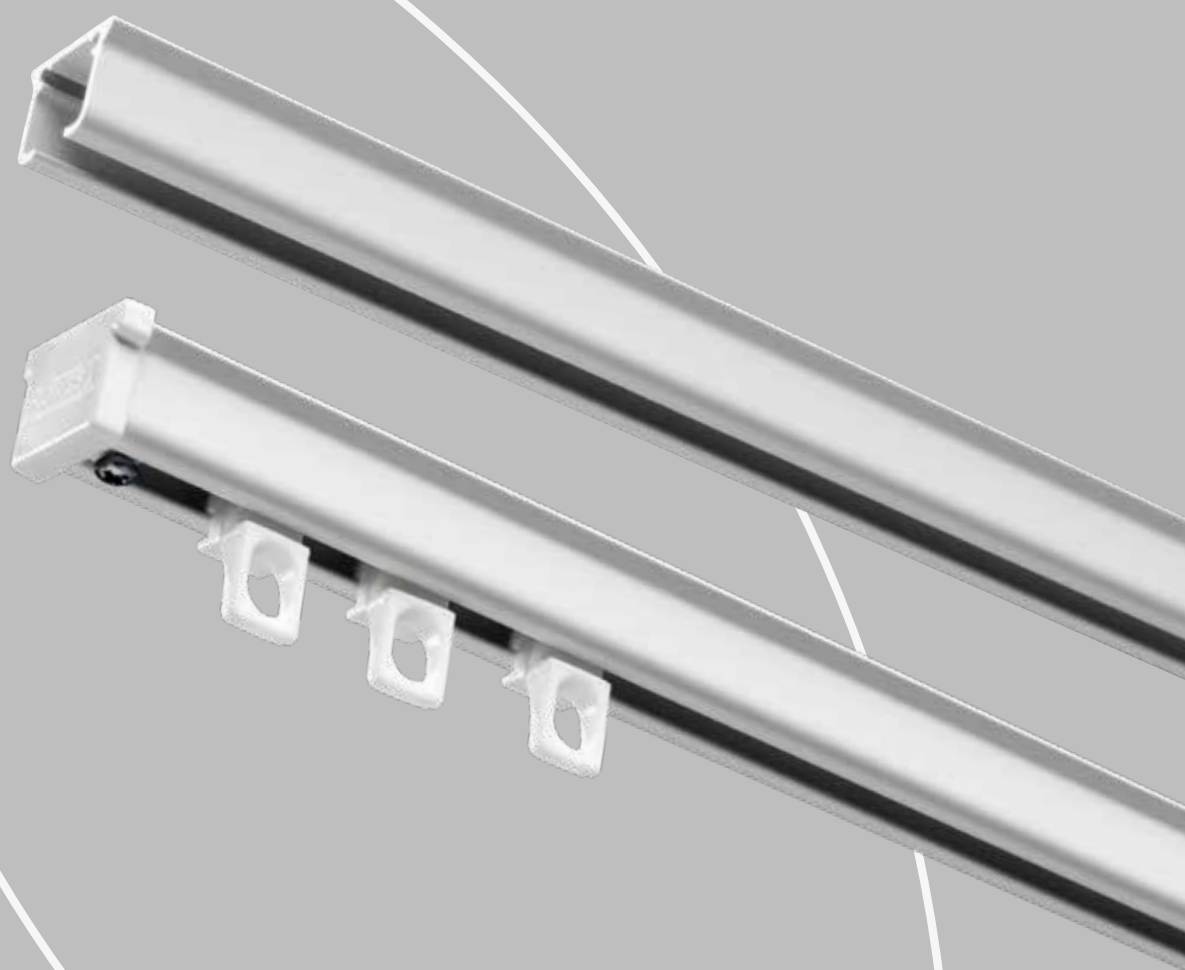


KS[®]
Klick System

Product information

- Highly efficient hand drawn system for all types of medium weight draperies.
- Quick installation with "Smart Klick" brackets for wall and ceiling applications.
- Bendable; it can be curved and reversed curved using a 10 cm (4") radius or continuous curve.
- Suitable for special window decoration as circular, arch and triangle window models.
- Heavy duty clickable carriers, UV-protected, for smooth and easy traversing. Offset shape for straight hanging pleats.
- Can also be used for Forest Easyfold System and accordiafold drapery systems.
- Maximum fabric weight: 8 kg per meter (6 LBS per ft.).
- Colours available: white, gold, silver, brown, black, cream, beige, red, blue, yellow and green.
- Special colours: available on request.
- Available lengths: 3 meter (9'10"), 4 meter (13'1"), 5 meter (16'4"), 6 meter (19'8"), 7 meter (23').
- Track finish: chromated powder coated with a factory applied patented dry lubricant.

Profile


- Shown actual size 1:1.
- Aluminium Extrusion.
- Weight: 150 grams per meter (1.62 ounce per ft.).
- Dimensions: 14 mm x 20 mm (0,6" x 0,8").
- KS Recess: 12,5 mm x 21 mm (0,5" x 0,8")

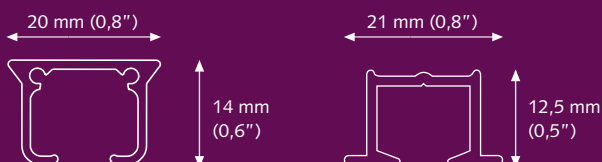

For use in


Hotels - offices - schools - healthcare - residences - boats - campers - planes or at any location where an efficient hand drawn system is required.

Applications

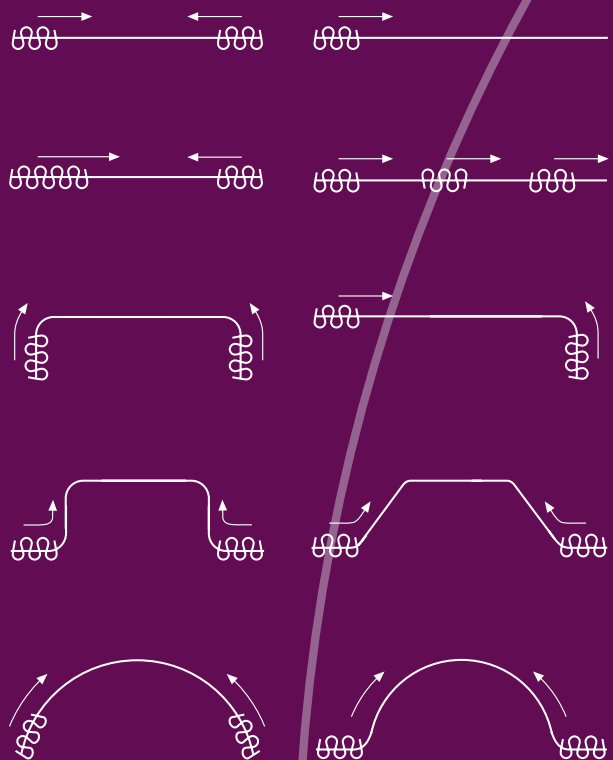


Special window decoration

Special bends

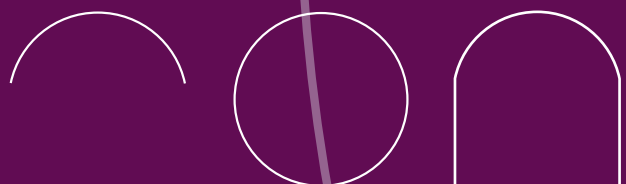


Bending/curving

The track can be curved and reversed curved using a 10 cm (4") radius. Additionally there is a curving possibility for special windows like arches, bows and circles.

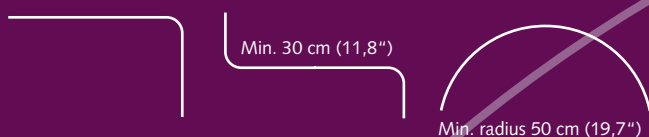

Bending instructions available on request.

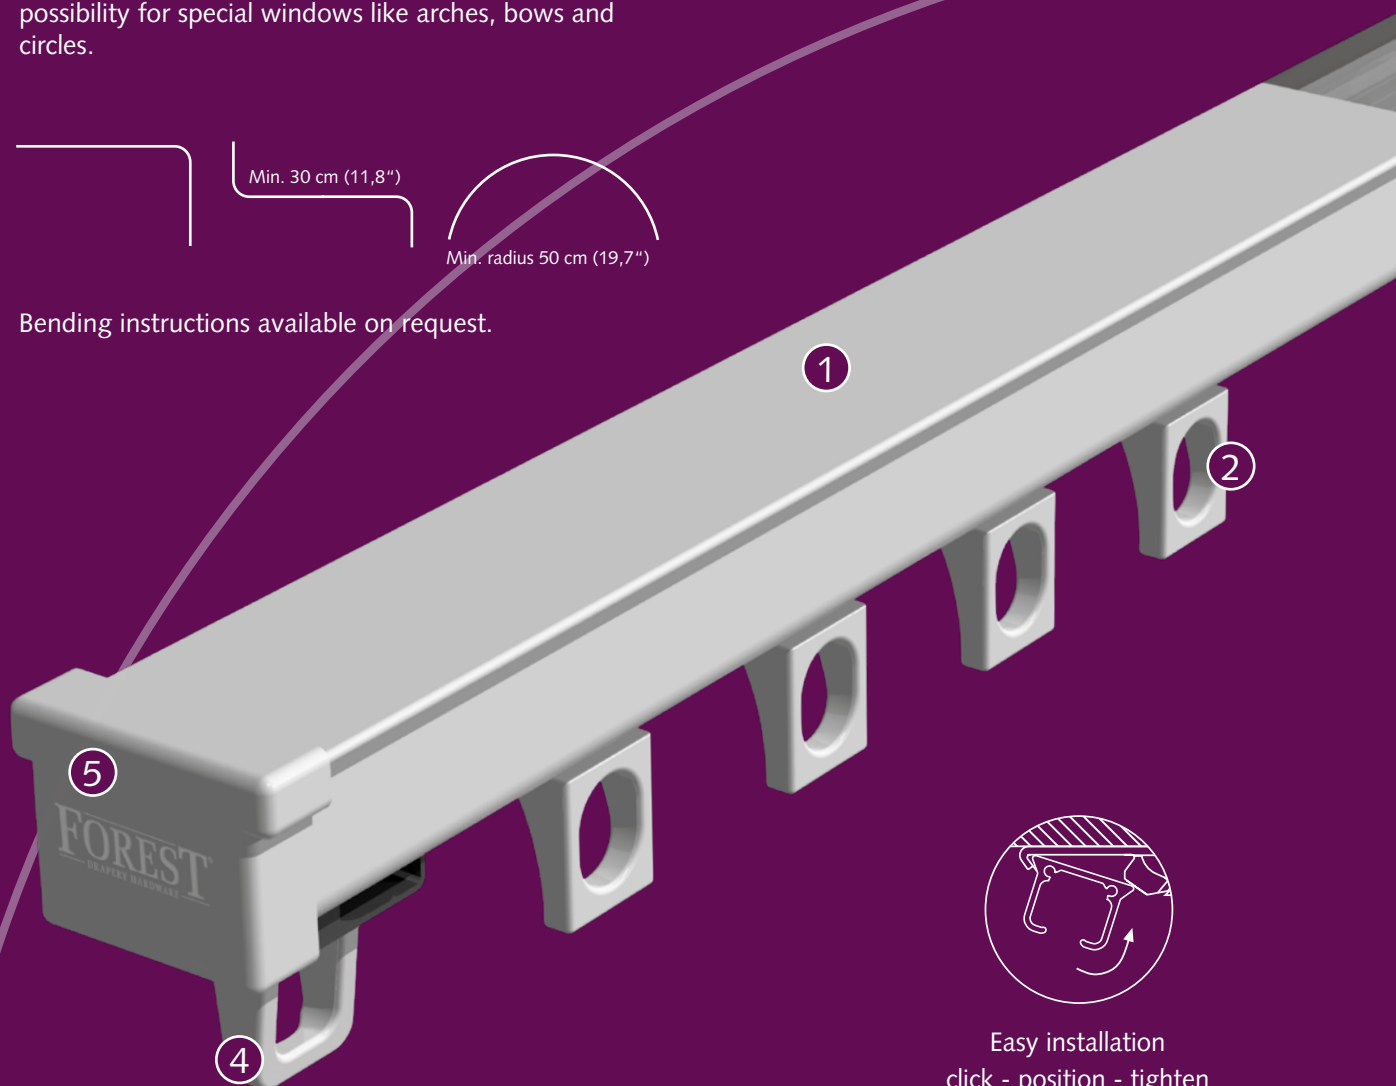

- ① KS track
- ② Carrier
- ③ Stop Carrier
- ④ Twist End Stop
- ⑤ Twist End Stop with cap




Easy installation
click - position - tighten




clickable carrier

25 mm (1")

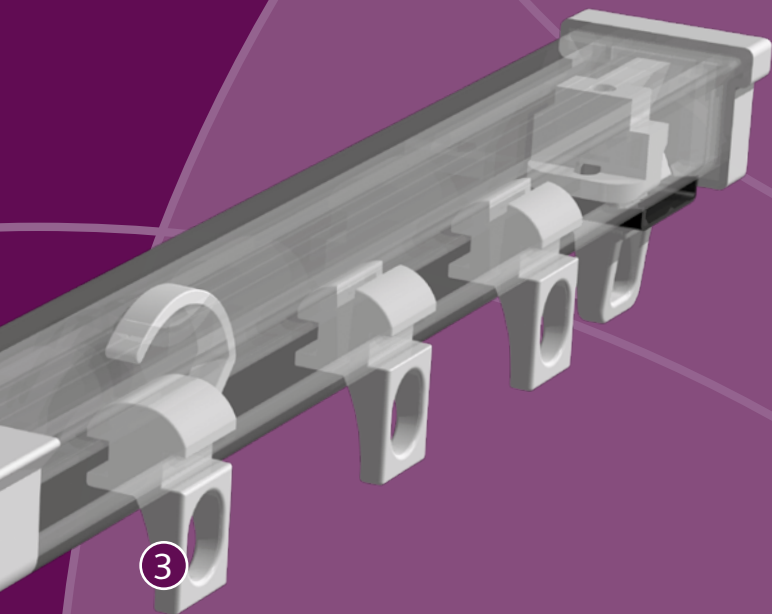

Wall bracket
3,5 cm (1,4")
6 cm (2,4")



A) Min. 10 cm (4")




A) Min. 15 cm (6")



Other brackets are available. Brackets need to be placed every 60 cm (24").



Mounting Brackets

Smart Click Ceiling Bracket

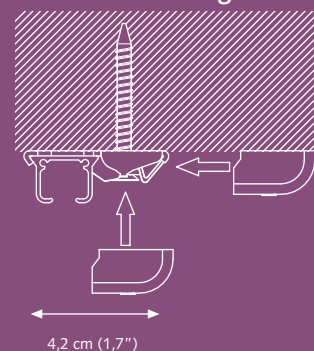

Aluminium Wall bracket single


A) 7,5 cm (3") : B) 6,3 cm (2,5")
A) 10 cm (4") : B) 8,8 cm (3,5")



**Smart Klick Cover
Cap Alu Wall
Bracket Universal**

Aluminium Wall bracket double

A) 15 cm (6") : B) 9,2 cm (3,6") , C) 4,5 cm (1,8")
A) 20 cm (8") : B) 9,2 cm (3,6") , C) 9,5 cm (3,7")

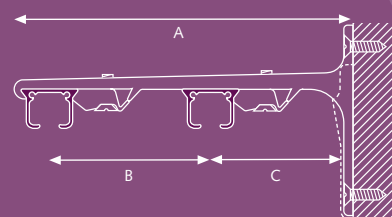

Aluminium Wall bracket triple
25 cm (10")

